

WEEE Number: 80133970

INSTALLATION INSTRUCTION

LED BEDLIGHT WITH SENSOR









TECHNICAL DATA:

MODEL	WATTS	VOLTAGE	LED/M	IP RATING	DIMMABLE	STRIP LENGTH	SENSOR DISTANCE	DELAY TIME
VT-8067	3W	DC:12V	30	IP20	YES	1.2m x1	2-5m	30sec, 130sec, 380sec
VT-8068	6W	DC:12V	30	IP20	YES	1.2m x2	2-5m	30sec, 130sec, 380sec

INTRODUCTION & WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 3 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 Hours Daily operation. Usage of product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.

WARNING!

- 1. Please make sure to turn off the power before starting the installation.
- 2. The light source of this luminaire is not replaceable, when the light source reaches its end of life the whole luminaire should be replaced.
- 3. Install only by certified Electrician.




This marking indicates that this product should not be disposed of with other household wastes.




Caution, risk of electric shock.

FOR INDOOR USE ONLY


INSTALLATION INSTRUCTIONS

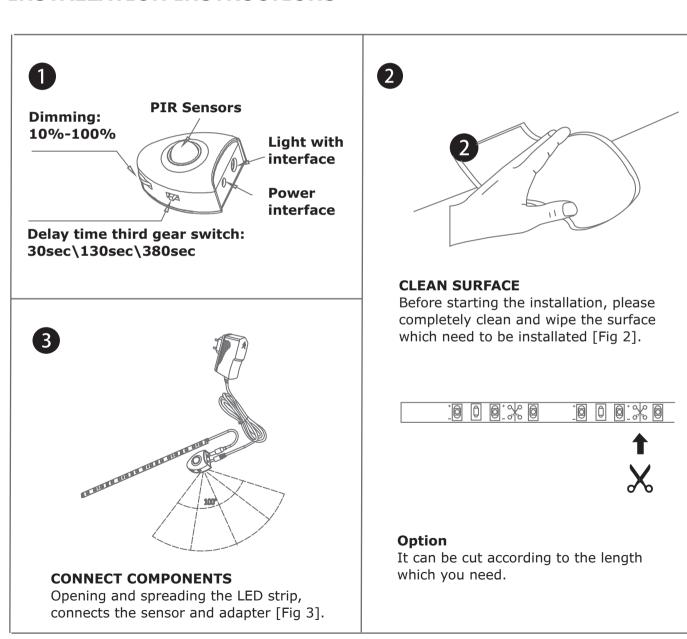




CHOOSE THE SENIOR INSTALLATION POSITION

Choose a best position where the sensor will be installed can directly feel body motion movement or the ambient light. Advice A or B position [Fig 4]




INSTALLATION UNDER THE BED

Place the connected components under the bed. To ensure that the adapter is plugged into a power socket, Otherwise, add an extra power socket. Before installing the sensor and strips, please tear up 3M tape adhesive protection layer. [Fig 5]



POWER SUPPLY

Please plug the adapter into the socket [Fig 6] and the sensor will be automatically timing time about 30 seconds after power on.



INSTALLATION SUGGESTIONS

After finishing the installation, please use the right clips to fix the connection wires [Fig 4]

In case of any query/issue with the product, please reach out to us at: support@v-tac.eu. For More products range, inquiry please contact our distributor or nearest dealers. V-TAC EUROPE LTD. Bulgaria, Plovdiv 4000, bul.L.Karavelow 9B