


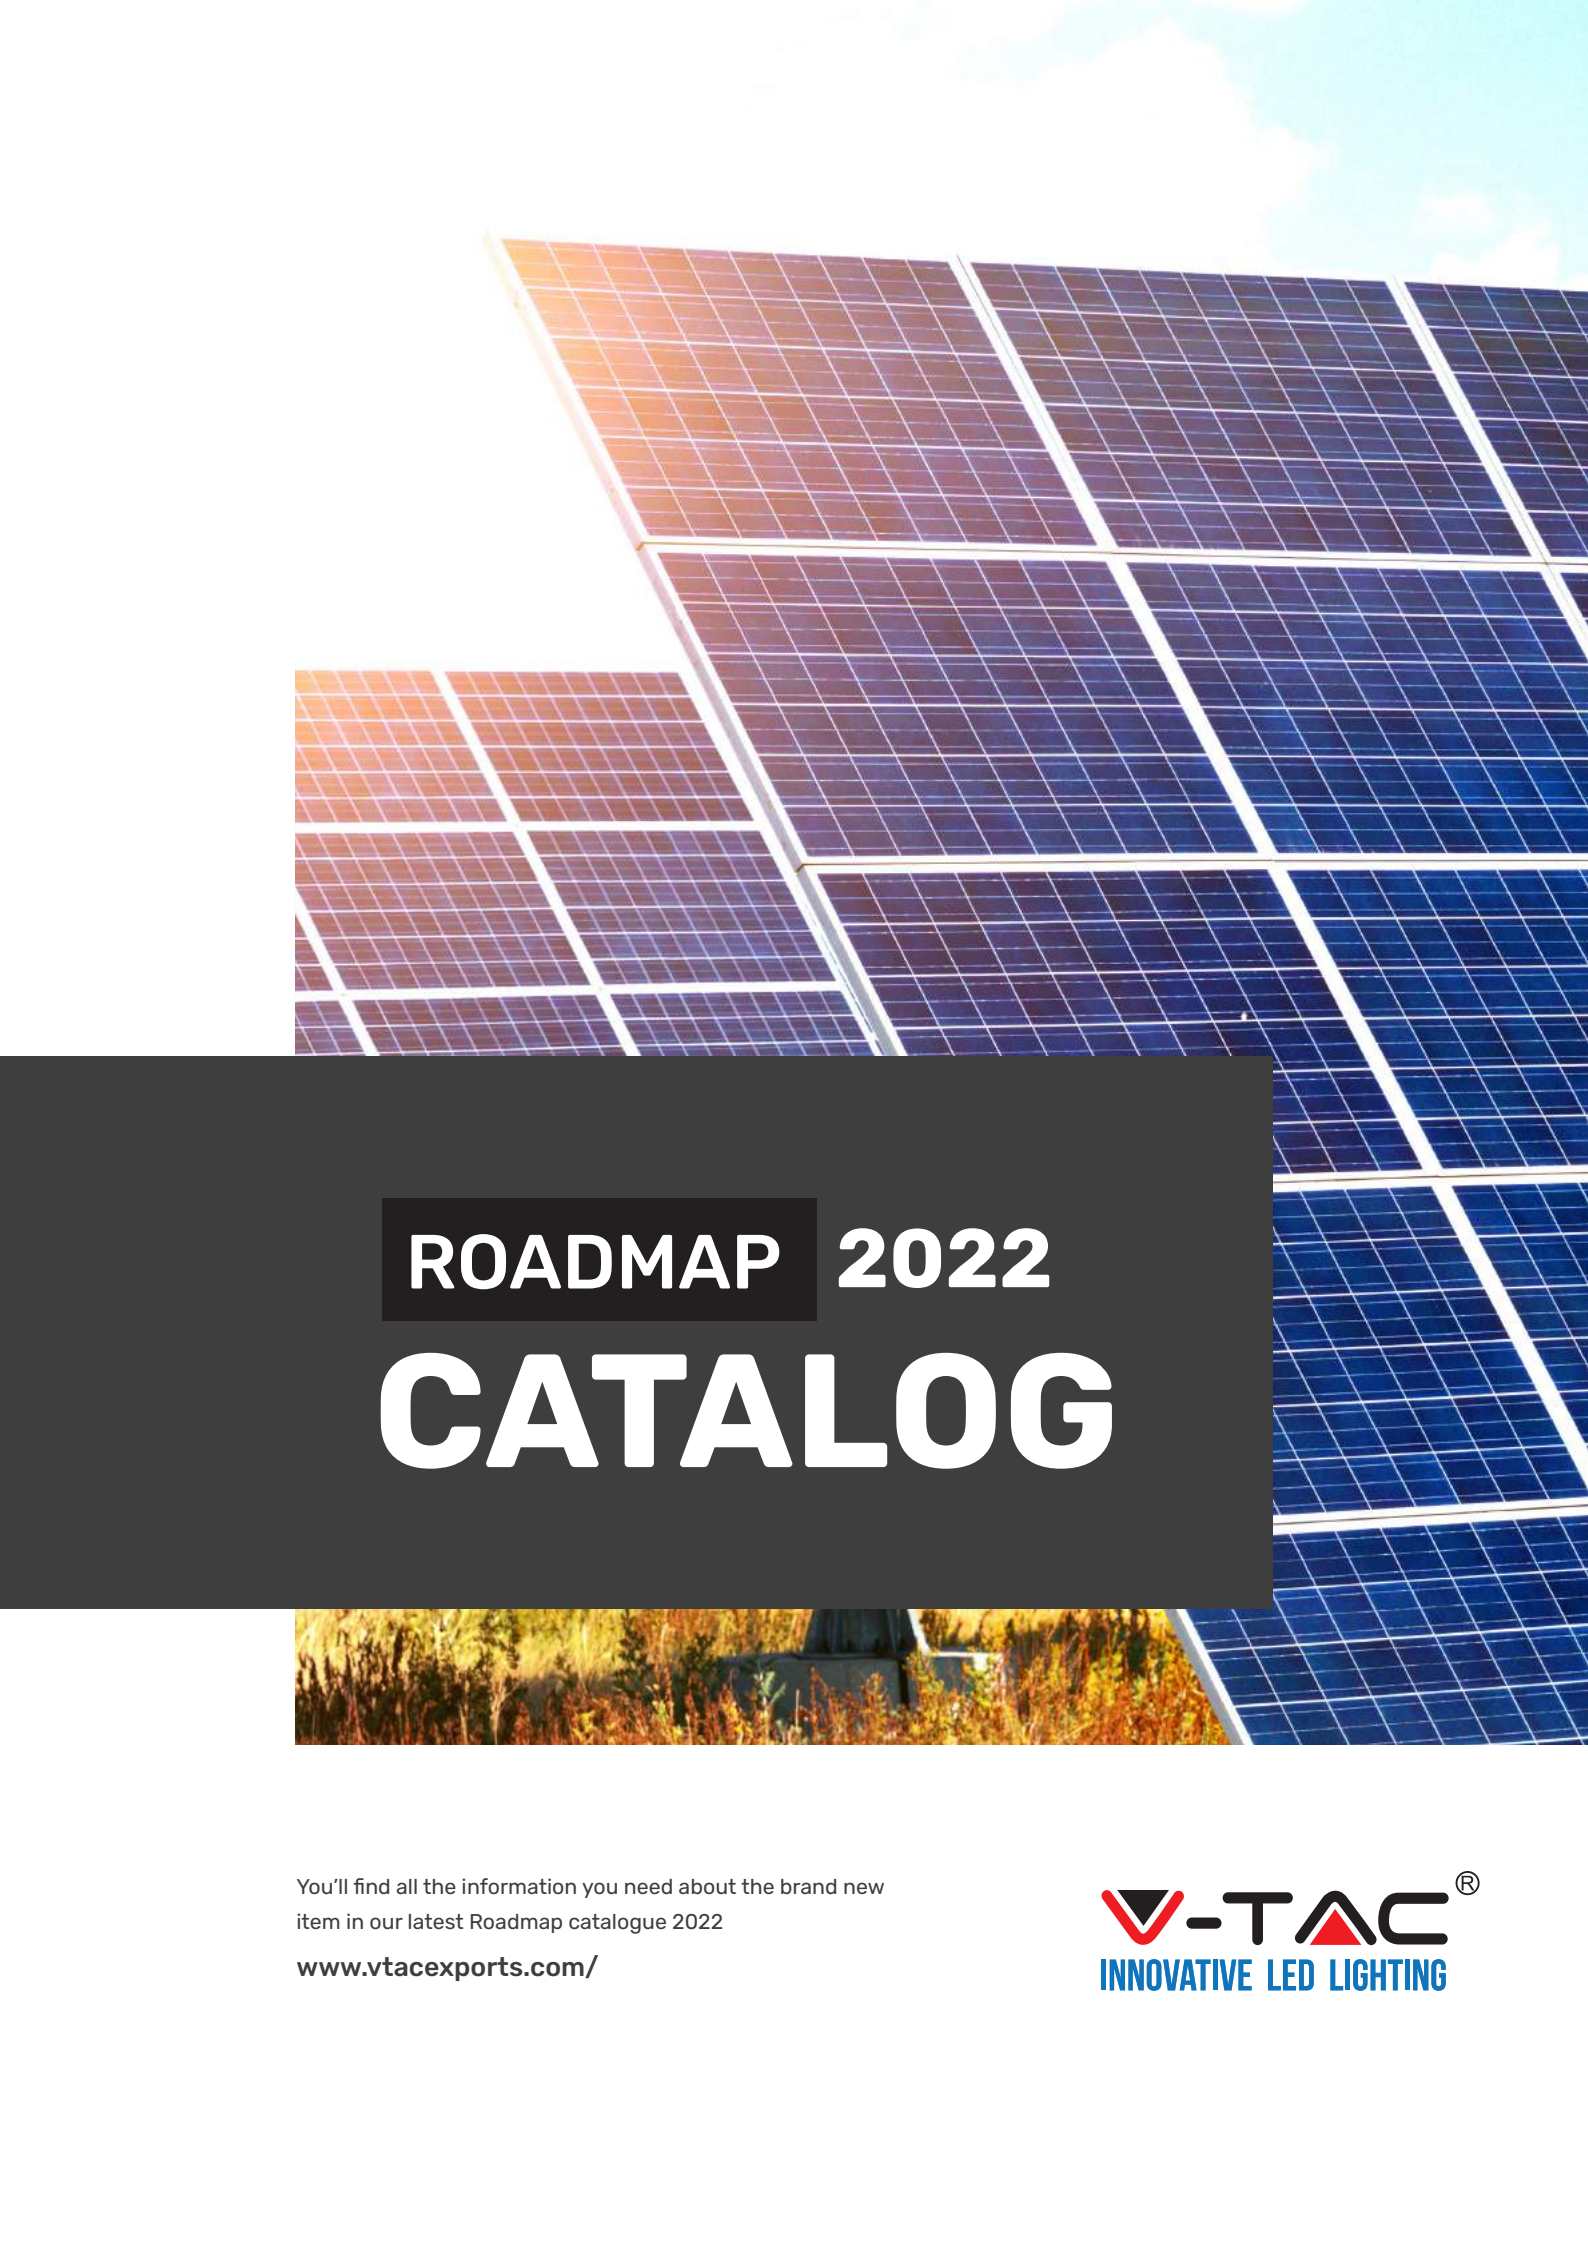

ROADMAP 2022 CATALOG

You'll find all the information you need about the brand new
item in our latest Roadmap catalogue 2022

www.vtacexports.com/

V-TAC[®]
INNOVATIVE LED LIGHTING

Welcome to our Roadmap 2022



Upcoming Categories

LED FLOODLIGHT

GU10 FITTINGS

LED STREETLIGHTS

LED STRIP LIGHTS

OUTDOOR LIGHTING

LED SMART LIGHTS

LED HIGHBAYS

DESK LAMPS

LED PANELS

CEILING FANS

LED SOLAR LIGHTS

TROLLEY SPEAKERS

SOLAR PANLE




INTRODUCING HIGH EFFICIENCY

SOLAR PANELS

One Time for a Lifetime



SOLAR PANEL

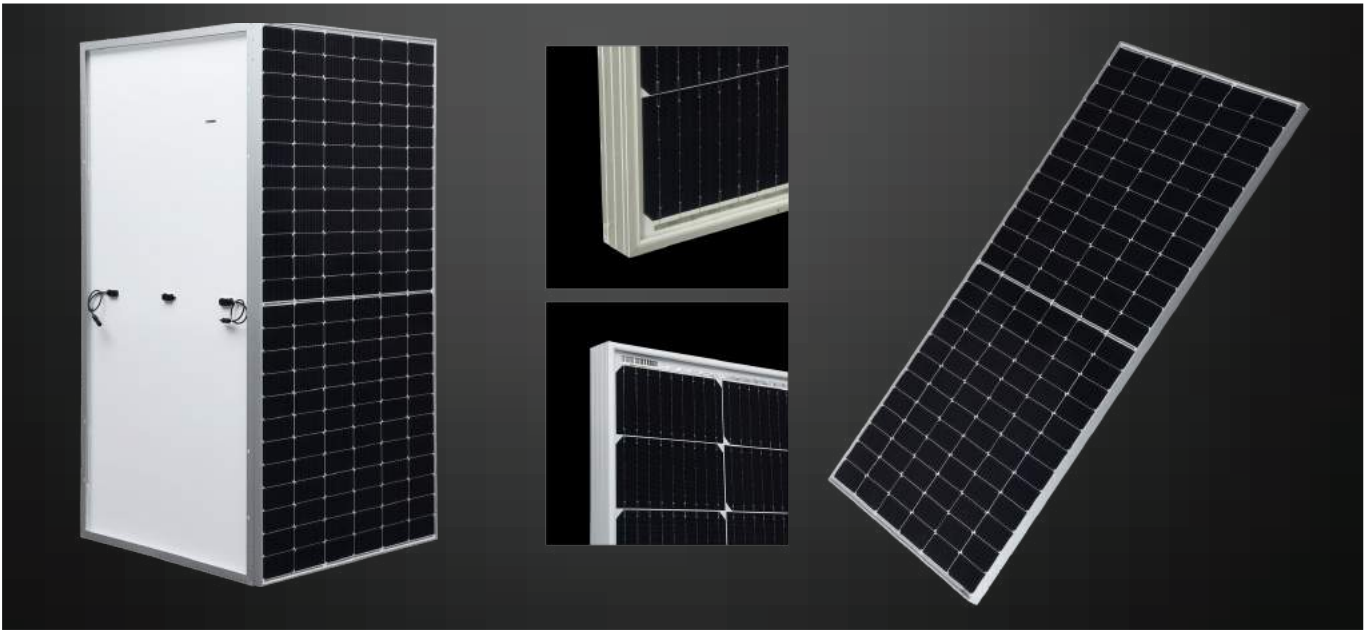

Positive tolerance
 Positive tolerance of up to 5W delivers higher output reliability.



High Efficiency
 Higher module conversion efficiency benefit from half cell structure (low resistance characteristic).



PID Resistance
 Excellent Anti-PID performance guarantee limited power degradation for mass production.



Low-light Performance
 Advanced glass and cell surface textured design ensure excellent performance in low-light environment.



Severe Weather Resilience
 Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).



Durability Against Extreme Environmental Conditions
 High salt mist and ammonia resistance certified by TUV NORD.

Model	SKU	Watts
VT-450	11353	450W
VT-545	11354	545W



Residential



Commercial



Industrial

COST-EFFECTIVE

SOLAR LIGHTS

Durable, Long life.



LED SOLAR STREETLIGHT Solar Streetlight

SAMSUNG
LED

Illuminated



Model	SKU	Watts
VT-ST303	20341 6400K WHITE	300W

- Charging Time: 4-6 Hours
- Working Time: 8-10 Hours



SOLAR
LIGHTS



IP65
RATING



5 YEAR
WARRANTY

LED SOLAR STREETLIGHT Integrated Solar Panel Street Light



Model	SKU	Watts
<u>VT-20201ST</u>	6755 – 4000K DAY WHITE 6756 – 6400K WHITE	200W
<u>VT-30301ST</u>	6757 – 4000K DAY WHITE 6758 – 6400K WHITE	300W
<u>VT-40401ST</u>	6759 – 4000K DAY WHITE 6760 – 6400K WHITE	400W

- Charging Time: 4-6 Hours
- Working Time: 8-10 hours in always mode, 12 hours in induction mode
- Body Type: Polycrystalline Silicon Panel
- Size: 680×320×50mm




Solar Wall Light-Remote Control



**IP44
RATING**

- Charging Time: 4-6 hrs Sunlight Charging
- Working Time: Min 3 hrs and Max 12 hrs

Model	SKU	Watts
VT-969	93575 - 3IN1	0.8w

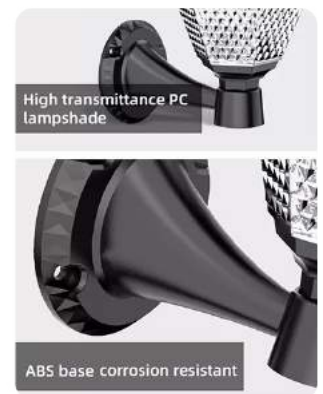

Automatic charging during the day

Automatic light at night

Solar Wall Light-Remote Control



**IP44
RATING**

- Charging Time: 4-6 hrs Sunlight Charging
- Working Time: Min 3 hrs and Max 12 hrs

Model	SKU	Watts
VT-972	93578 - 3IN1	0.8w



Automatic charging during the day

Automatic light at night

Solar Wall Lamp



- Charging Time: 5-6 Hours
- Working Time: 10-12 Hours

Model	SKU	Watts
<u>VT-982-S</u>	2889 - 3IN1	2w



Solar Stand Lamp



- Charging Time: 5-6 Hours
- Working Time: 10-12 Hours

Model	SKU	Watts
<u>VT-983-S</u>	2890 - 3IN1	2w



Solar Wall Lamp



- Charging Time: 5-6 Hours
- Working Time: 10-12 Hours

Model	SKU	Watts
<u>VT-982</u>	2892 - 3000K+6000K WARM WHITE+WHITE	2w



Solar Stand Lamp



- Charging Time: 5-6 Hours
- Working Time: 10-12 Hours

Model	SKU	Watts
<u>VT-983</u>	2893 - 3000K+6000K WARM WHITE+WHITE	2w



Solar Lawn Lamp



**IP44
RATING**

- Charging Time: 5-6 Hours
- Working Time: 10-12 Hours

Model	SKU	Watts
<u>VT-984</u>	2894 - 3000K+6000K WARM WHITE+WHITE	2w




Solar Lawn Lamp



**IP44
RATING**

- Charging Time: 5-6 Hours
- Working Time: 10-12 Hours

Model	SKU	Watts
<u>VT-984-S</u>	2891 - 3IN1	2w

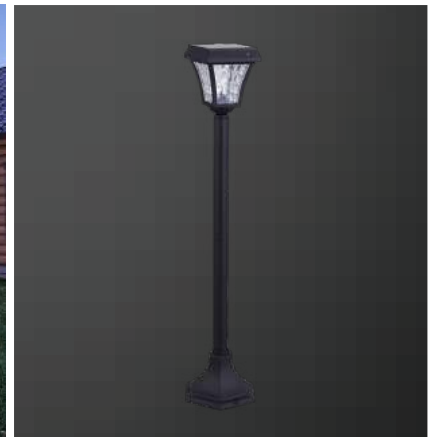


Solar Bollard Lights



**IP65
RATING**

- Charging Time:
- Working Time: 12 Hours

Model	SKU	Watts
<u>VT-945</u>	6666 - 3000K WARM WHITE 6665 - 4000K DAY WHITE	5w

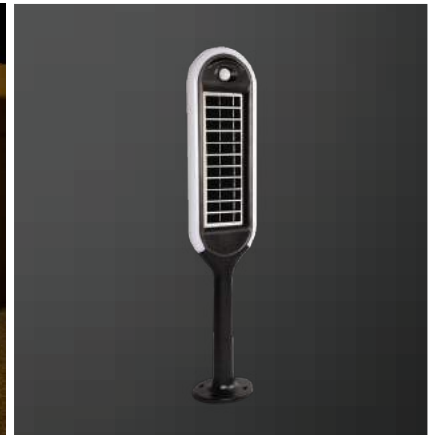


2IN1 Garden Light



**IP65
RATING**

- Charging Time: 4-5 Hours
- Working Time: 30-36 Hours

Model	SKU	Watts
<u>VT-943</u>	6668 - 3000K WARM WHITE 6667 - 4000K DAY WHITE	3w

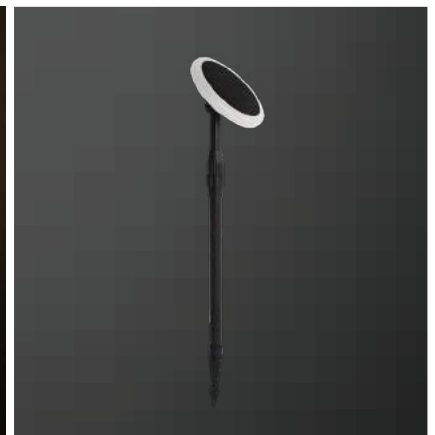


Solar Garden Light - Adjustable



**IP65
RATING**

- Charging Time: 4-5 Hours
- Working Time: 30-36 Hours

Model	SKU	Watts
VT-948	6670 - 3000K WARM WHITE 6669 - 4000K DAY WHITE	8w

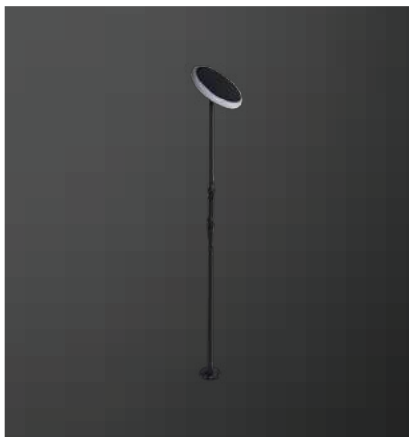

Solar Spike Light



**IP65
RATING**

- Charging Time: 6-8 Hours
- Working Time: 10-12 Hours

Model	SKU	Watts
VT-952	6660 - 3000K WARM WHITE 6661 - 4000K DAY WHITE 6662 - 6400K WHITE	2w



Solar Tri-Proof Light with Sensor



**IP65
RATING**



CCT CHANGING
With Remote Control
TIMER FUNCTION

- Charging Time: 4-6 Hours
- Working Time: 8-10 Hours

Model	SKU	Watts
VT-120018	6500 - 3IN1	18w



Solar Bulb with Sensor



**IP20
RATING**



RECHARGEABLE

- Charging Time: 8 Hours
- Working Time: 6 Hours


Model	SKU	Watts
VT-2417	2857 - 3IN1	7w



OUTDOOR LIGHTING

| Garden Light 2IN1 (Lamp Post + Spike)

- IP65 Rating.
 - COB-Samsung Chip
 - 3 Years Warranty
 - AC:220-240V, 50/60Hz
 - Body Type: Aluminium
 - 100° Beam Angle
 - CRI >80
 - PF>0.5
 - 20,000-hour lifespan
 - On/Off Cycle >15000




Model	SKU	Watts	Lumen	Box Qty
VT-907	20316 3000K WARM WHITE 20317 4000K DAY WHITE 20318 6400K WHITE	7W	420	20

SUPER-BRIGHT

LED STRIP LIGHTS

Create a colorful atmosphere

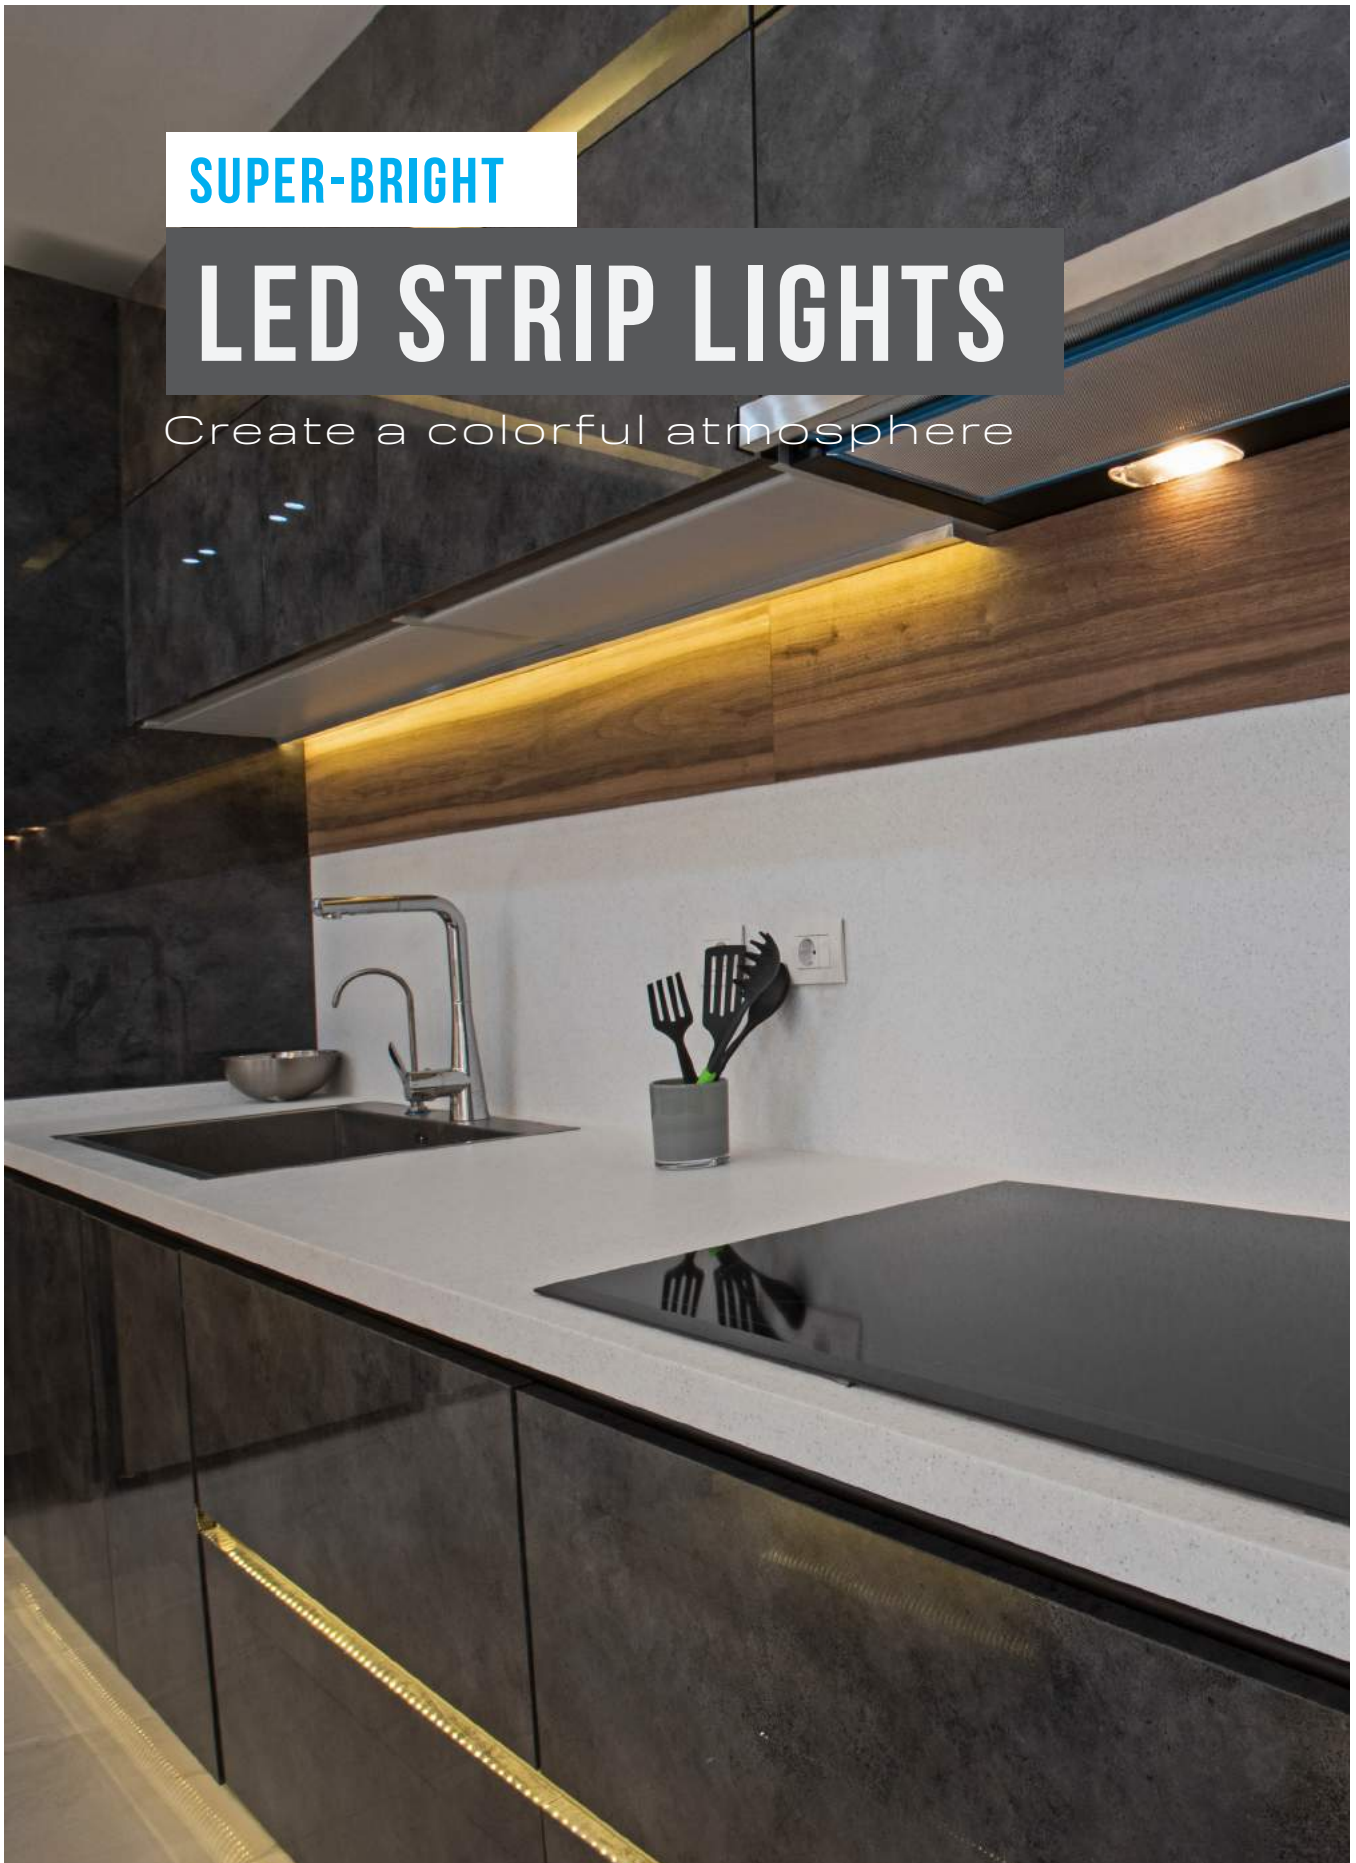

Introducing New 4040-60 Strip Light



SINGLE CHIP LED

LED Strip Lights **LED Strip-4040-60**

VT-4040-60

2933 - 6400K WHITE
2931 - 3000K WARM WHITE
2932 - 4000K DAY WHITE

Watt/M: 8W
Voltage: DC:12V
LED Qty/M: 60
LED Type: SMD
Beam Angle: 120°
IP Rating: IP20
Width: 8mm
Box Qty: 400 Meters



5m
ROLL



IP20
RATING





LED Strip Lights

Strip Light-5050 RGB + CCT 5IN1

VT-5050 60 IP20-24W
2895 - 5IN1

Watt/M: 24W
Voltage: DC:24V
LED Qty/M: 60
LED Type: SMD
Beam Angle: 120°
IP Rating: IP20
Box Qty: 400MM

RGB + 3000K- 6400K
Many different colors, various lighting Modes, Dimmable.



LED Strip Lights

Strip Light-5050 RGB + CCT 5IN1

VT-5050 60 IP65-RGB -24W
2896 -5IN1

Watt/M: 24W
Voltage: DC:24V
LED Qty/M: 60
LED Type: SMD
Beam Angle: 120°
IP Rating: IP20
Box Qty: 400MM

RGB + 3000K- 6400K
Many different colors, various lighting Modes, Dimmable.



LED Strip Lights

Striplights 2835 - CCT

VT-2835 120-IP20-14W
2897 -3IN1

Watt/M: 14W
Voltage: DC:24V
LED Qty/M: 120
LED Type: SMD
Beam Angle: 120°
IP Rating: IP20
Width: 10mm
Box Qty: 400 Meters

3000K- 6400K



LED Strip Lights


Striplights 2835 - CCT

VT-2835 120-IP65-14W
2898 - 3IN1

Watt/M: 14W
Voltage: DC:24V
LED Qty/M: 120
LED Type: SMD
Beam Angle: 120°
IP Rating: IP65
Width: 10mm
Box Qty: 200 Meters

3000K- 6400K



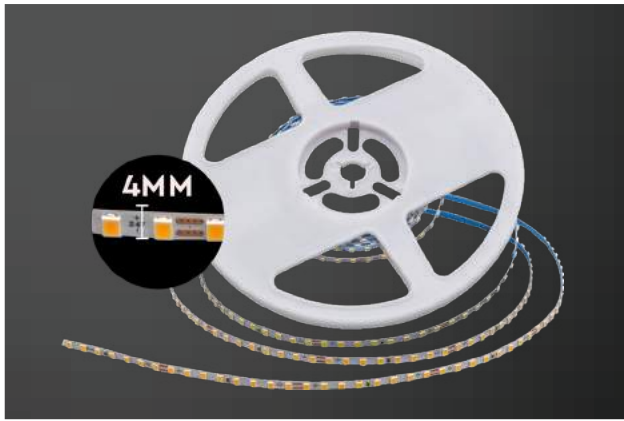


LED Strip Lights

LED Strip-2835 128 LEDs

VT-2835 128-24V

2908 - 6400K WHITE
2906 - 3000K WARM WHITE
2907 - 4000K DAY WHITE

Watt/M: WW-8.5W/ DW-8.5W/W-9W
Voltage: DC:24V
LED Qty/M: 128
LED Type: SMD
Beam Angle: 120°
IP Rating: IP20
Width: 4mm
Box Qty: 400 Meters

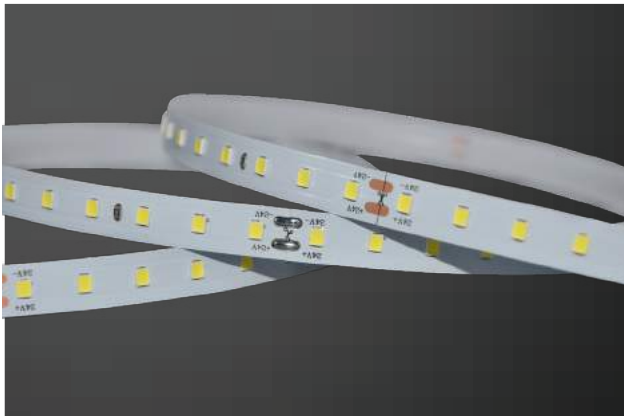

LED Strip Lights

Striplights 2835 90-High Lumen

VT-2835 90

2698 - 6400K WHITE
2696 - 3000K WARM WHITE
2697 - 4000K DAY WHITE

Watt/M: 20W
Voltage: DC:24V
LED Qty/M: 90
LED Type: SMD
Beam Angle: 120°
IP Rating: IP20
Width: 10mm
Box Qty: 400 Meters




LED Strip Lights

LED COB Striplights IP20

VT-COB 421

2669 - 6400K WHITE
2667 - 3000K WARM WHITE
2668 - 4000K DAY WHITE

Watt/M: 10W/M
Voltage: DC:24V
LED Qty/M: 420
LED Type: COB
Beam Angle: 120°
IP Rating: IP20
Width: 10mm
Box Qty: 400 Meters

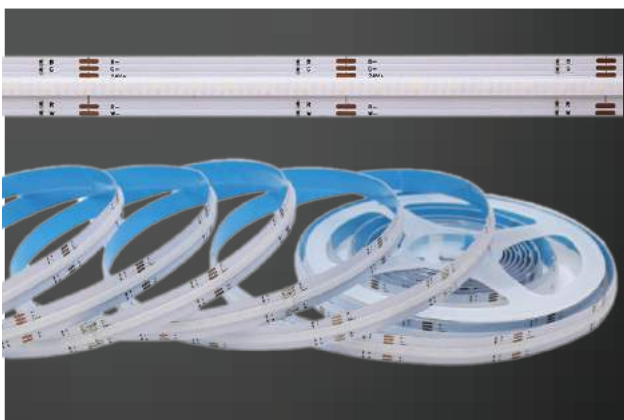

LED Strip Lights

LED COB Striplights IP20

VT-COB 422

2880 - RGB

Watt/M: 13W/M
Voltage: DC:24V
LED Qty/M: 762
LED Type: COB
Beam Angle: 120°
IP Rating: IP20
Width: 10mm
Box Qty: 400 Meters



16 Millions of colors to choose

Color Saturation control



DC 12V~24V
Available

LED Light interface

Classic PC material
high quality

SINGLE COLOR CONTROLLER



Model	SKU
VT-2431	2911

- Voltage: DC:12V-24V
- Working Temperature: -10~40 °C
- Output: Max 12A
- RF: 2.4GHz
- Control Distance: 30m
- Output connection: Common anode

RGB CONTROLLER



Model	SKU
VT-2432	2912

- Voltage: DC12V-24V
- Working Temperature: -10~40°C
- Output Max: 6A/Channel
- Total Output Max:12A
- RF: 2.4GHz
- Control Distance: 30m
- Output connection: Common anode

RGB+W CONTROLLER



Model	SKU
VT-2434	2913

- Voltage: DC12V-24V
- Working Temperature: -10~40°C
- Output Max: 6A/Channel
- Total Output Max:12A
- RF: 2.4GHz
- Control Distance: 30m
- Output connection: Common anode

5 CHANNEL AMPLIFIER



Model	SKU
VT-2435	2914

- Voltage: DC12V/24V
- Work Temperature: -20~60°C
- Output Voltage: DC12V/24V
- Output Current: 6A/Channel
- Total output Max: 15A
- Switching Rate: 10Mbps
- Connection: Common anode

Simple but multi-functional

Easy installation, safe and reliable

- 16 Millions of colors to choose
- Color temperature adjustable
- Dimmable Saturation control
- 2.4G RF wireless transmission technology
- Remote control control distance 30m
- Smartphone APP control (2.4GHz gateway is needed)
- Support third party voice control (2.4GHz gateway is needed)
- DMX512 controllable (DMX512 LED transmitter is needed)




Compatible with RGB / RGBW / and RGB+CCT LED strip

Switching RGB, RGBW and RGB+CCT version randomly



Sensitive touching

High precision Capacitive touch screen IC, Touch Screen is very stable

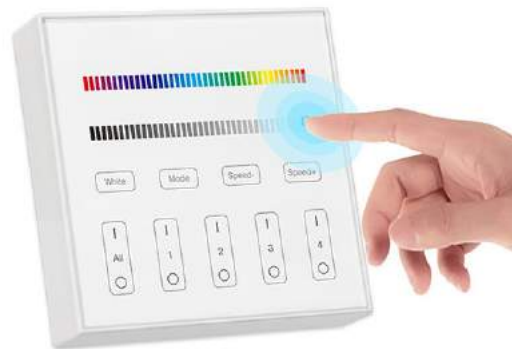

High-end tempered glass panel


Tempered glass panel, scratching and crushing resistance



WALL CONTROLLER - 3 IN 1

Model	SKU
VT-2433	2915


- Voltage: DC12V-24V
- Output Max: 5A/Channel
- Total Output Max: 10A
- RF: 2.4GHz
- Control Distance: 30m
- Working Temperature: -20~60°C
- Panel Size: 86×86mm
- Compatible with RGB/RGBW/RGB+CCT strips

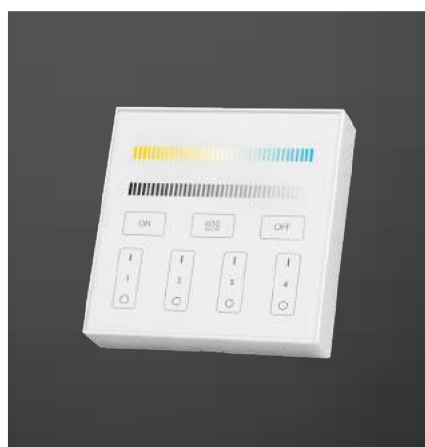

4 ZONE CONTROLLER

Model	SKU
VT-2439	2916

- Voltage: 3V(2*AAA Battery)
- Transmission Frequency: 2400~2483.5MHz
- Modulation Method: GFSK
- Transmitting Power: 6dBm
- Control Distance: 30m
- Standby Power: 20uA
- Working Temperature: -10 ~40°C
- Panel Size: 86×86×16mm

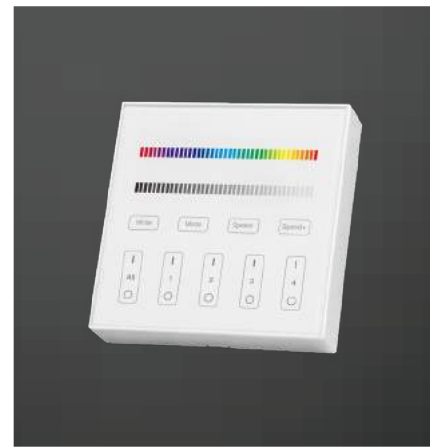

4 ZONE RGB+W CONTROLLER

Model	SKU
VT-2437	2917

- Voltage: 3V(2*AAA Battery)
- Transmission Frequency: 2400~2483.5MHz
- Modulation Method: GFSK
- Transmitting Power: 6dBm
- Control Distance: 30m
- Standby Power: 20uA
- Working Temperature: -10 ~40°C
- Panel Size: 86×86×16mm

Night light mode, take care of your family

Long press OFF button to Night light mode, convenient for the night.
Convenient for getting up in dark night



Touch Dimming Remote Controller

2.4GHz wireless transmission, Brightness Adjustable
Control distance 30m



2.4G wireless transmitting Control distance 30m


Adopt 2.4G wireless transmitting technology, with strong anti-interference,
long distance transmission, Control distance 30m, easier operation



TOUCH DIMMER-WHITE

Model	SKU
VT-2440-W	2919

- Voltage: 3V(2*AAA Battery)
- Working Temperature: -20 -60°C
- Transmission Frequency: 2400-2483.5MHz
- Modulation Method: GFSK
- Transmitting Power: 6dBm
- Standby Power: 20uA
- Control Distance: 30m

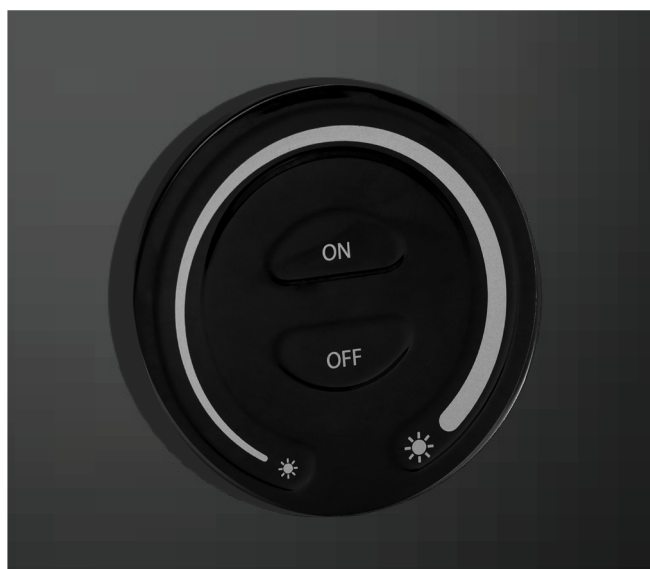


TOUCH DIMMER-BLACK

Model	SKU
VT-2440-B	2920

- Voltage: 3V(2*AAA Battery)
- Working Temperature: -20 -60°C
- Transmission Frequency: 2400-2483.5MHz
- Modulation Method: GFSK
- Transmitting Power: 6dBm
- Standby Power: 20uA
- Control Distance: 30m

Signal transmitting

One strip controller can transmit the signals from the remote control to another controller within 30m, as long as there is a strip controller within 30m, the remote control distance can be limitless.

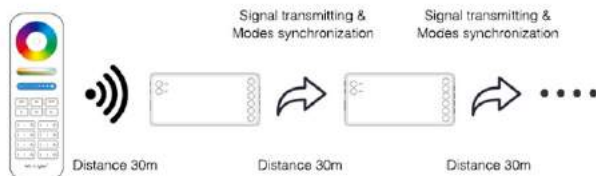

Modes synchronization

Different controllers can work synchronously when they are started at different times, controlled by the same remote, under same dynamic mode and within 30m distance.

Newest appearance, comfortable hand feeling

Unique and beautiful appearance design. Humanized design; better hand feeling; easy operation.



Super Compability, 2.4G wireless transmitting

Fully compatible with LED Strip Lights.
Adopts 2.4GHz wireless technology,
Long signal transmission, better controlling experience.



16 million colors to choose



8 ZONE REMOTE CONTROL

Model	SKU
VT-2438	2921

- Voltage: 3V(2*AAA Battery)
- Control Distance: 30m
- Size: 47×19×153mm



4 ZONE REMOTE CONTROL

Model	SKU
VT-2436	2918

- Voltage: 3V(sevtion 2 batteries)
- Control Distance: 30m
- Size: 53×21×110.5mm



TOUCH REMOTE CONTROL RGB+CCT

Model	SKU
VT-2441	2922

- Voltage: 3V(2*AAA Battery)
- Control Distance: 30m
- Size: 56×20×153mm



TOUCH REMOTE CONTROL RGB+W-

Model	SKU
VT-2442-W	2923

- Voltage: 3V(sevtion 2 batteries)
- Control Distance: 30m
- Size: 52.5×21×120mm



TOUCH REMOTE CONTROL RGB+W-BLACK

Model	SKU
VT-2442-B	2924

- Voltage: 3V(sevtion 2 batteries)
- Control Distance: 30m
- Size: 52.5×21×120mm



Mounting Kit Black

Mounting Kit Black

Mounting Kit Black



Model: VT-8113
SKU: 2873
Dimension: 2000×17.4×7mm
Unit Color: Black



Model: VT-8109
SKU: 2874
Dimension: 2000×15.8×15.8mm
Unit Color: Black



Model: VT-8106
SKU: 2875
Dimension: 2000×24.7×7mm
Unit Color: Black

Mounting Kit Black

Mounting Kit Black

Mounting Kit Black



Model: VT-8108
SKU: 2876
Dimension: 2000×23.5×10mm
Unit Color: Black



Model: VT-8114
SKU: 2877
Dimension: 2000×19×19mm
Unit Color: Black



Model: VT-8110
SKU: 2878
Dimension: 2000×17.2×14.4mm
Unit Color: Black

Mounting Kit White



Model: VT-8126
SKU: 2871
Dimension: 2000×50×35mm
Unit Color: White

Mounting Kit White




Model: VT-8127
SKU: 2872
Dimension: 2000×50×75mm
Unit Color: White

Mounting Kit with Diffuser Surfaced



Model: VT-8136
SKU: 2903
Dimension: 2000×7.8×9mm
Unit Color: Silver

Mounting Kit with Diffuser Recessed

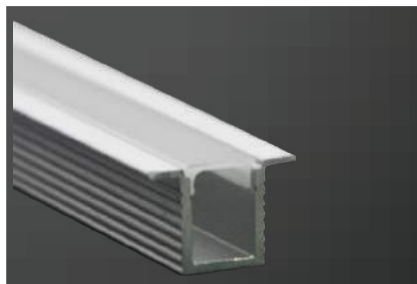

Model: VT-8137
SKU: 2904
Dimension: 2000×12.4×9mm
Unit Color: Silver

Mounting Kit Bendable Silver



Model: VT-8138
SKU: 2909
Dimension: 2000×18×6mm
Unit Color: Silver

Strip-Controller-RGB + CCT




Model: VT-2428
SKU: 2899
Input voltage: DC:12V/24V
Box Qty: 100

Strip-Controller-CCT



Model: VT-2425
SKU: 2901
Input voltage: DC:12V/24V
Box Qty: 100

Strip Controller- WiFi - RGB + CCT

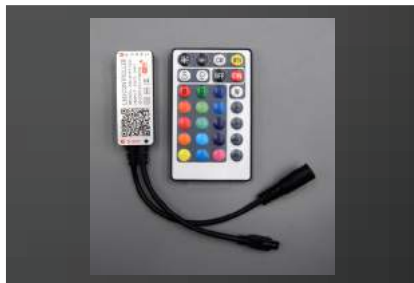


Model: VT-2429
SKU: 2900
Input voltage: DC:12V/24V

Strip WIFI Controller - CCT



Model: VT-2427
SKU: 2902
Input voltage: DC:12V/24V

QUICK CONNECT WIRE FOR LED STRIP LIGHT

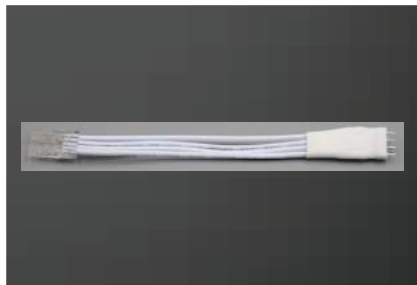

Model: 11341
SKU: 11341
Box Qty: 1000

QUICK MIDDLE CONNECTOR FOR LED STRIP LIGHT




Model: 11342
SKU: 11342
Box Qty: 1000

QUICK MIDDLE CONNECTOR WITH WIRE FOR LED STRIP LIGHT



Model: 11343
SKU: 11343
Box Qty: 500

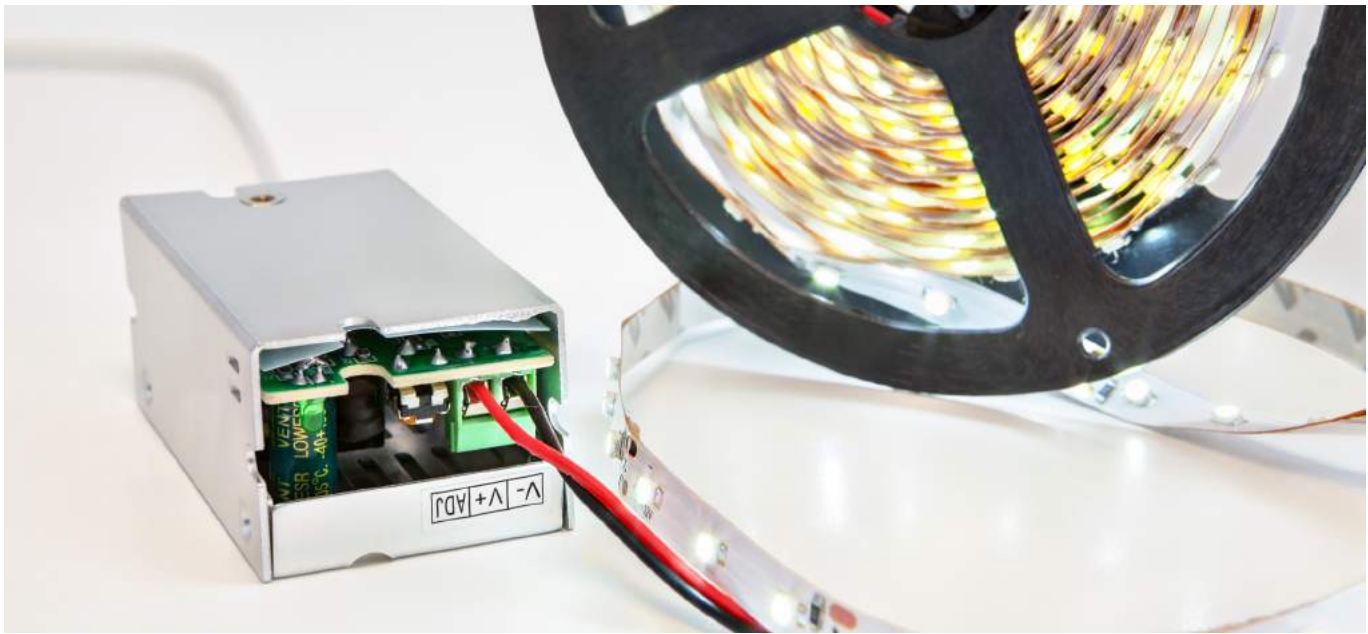

Power Supply – Plastic



Model	SKU	Watts	Current Capacity:	Input Power	Output
VT-23032	2671	30W	2.5A	AC:100-240V,50/60Hz	DC:12V
VT-23044	2672	42W	3.5A	AC:100-240V,50/60Hz	DC:12V

Power Supply – Metal



Model	SKU	Watts	Current Capacity:	Input Power	Output
VT-21061	2682	60W	5A	AC:100-240V,50/60Hz	DC:12V
VT-21062	2683	60W	2.5A	AC:100-240V,50/60Hz	DC:24V
VT-21071	2684	75W	6.25A	AC:176-264V,50/60Hz	DC:12V
VT-21072	2685	75W	3.15A	AC:176-264V,50/60Hz	DC:24V



Power Supply – Metal

Model	SKU	Watts	Current Capacity:	Input Power	Output
VT-21121	2686	120W	10A	AC:176-264V,50/60Hz	DC:12V
VT-21122	2687	120W	5A	AC:176-264V,50/60Hz	DC:24V
VT-21152	2688	150W	12.5A	AC:176-264V,50/60Hz	DC:12V
VT-21153	2689	150W	6.25A	AC:176-264V,50/60Hz	DC:24V



Power Supply – Metal

Model	SKU	Watts	Current Capacity:	Input Power	Output
VT-21252	2690	250W	20.8A	AC:176-264V,50/60Hz	DC:12V
VT-21253	2691	250W	10.41A	AC:176-264V,50/60Hz	DC:24V
VT-21301	2692	300W	25A	AC:176-264V,50/60Hz	DC:12V
VT-21302	2693	300W	12.5A	AC:176-264V,50/60Hz	DC:24V



Power Supply – Metal

Model	SKU	Watts	Current Capacity:	Input Power	Output
VT-21501	2694	500W	42A	AC:200-240V,50/60HZ	DC:12V
VT-21502	2695	500W	21A	AC:200-240V,50/60HZ	DC:24V

